


QI-4330 / QI-3320

Specification	QI-4330	QI-3320
CPU Support	Core i3-4330TE 2.4G	Pentium G3320TE 2.3G
System Memory	DDR3L,SO-DIMM x 2, 4GB(Max.16GB)	
OS Support	Windows® 7 Professional Windows® Embedded POSReady7 Windows® Embedded 8.1 Industry Linux	
Storage		
HDD	320GB 2.5"x 1	
SSD	SSD x 1 (Optional)	
LCD		
Size/Resolution	15" TFT LED LCD Panel/1024 x 768	
Brightness	350cd/m2 (Typ.)	
Touch Screen	True-Flat Projected Capacitive Touch	
Tilt Angle	0 ~ 120 degree	
External I/O Port		
Rear	4 x USB 2.0 & 2 x USB 3.0 Ports 3 x Serial port (RJ45) ; (COM1~3: 0/5/12V by BIOS) 1 x VGA (Power enable by BIOS; +12V) 1 x Cash Drawer Port (RJ11; +12V) 1 x Mic-In/Speaker-out (Combo Jack) 1 x LAN (10/100/1000) 1 x DC In 1 x Power Switch	
Power		
EMC Safety	CE, FCC Class A	
Environment		
Operating /Storage Temperature	0°C ~ 35°C/ -20°C ~ 60°C	
Operating /Storage Humidity	20% - 85% RH non condensing	
Optional		
Wall Mount	VESA 100 x 100mm	
MSR (USB)	MSR/MSR + Finger Print (Combo)/MSR + iButton (Combo)/MSR + RFID (Combo)	
Customer display (USB)	Flush mount VFD display, 2x20 characters	
2nd Display	10" (1024 x 768)	
Speaker	2 x 2W speaker	

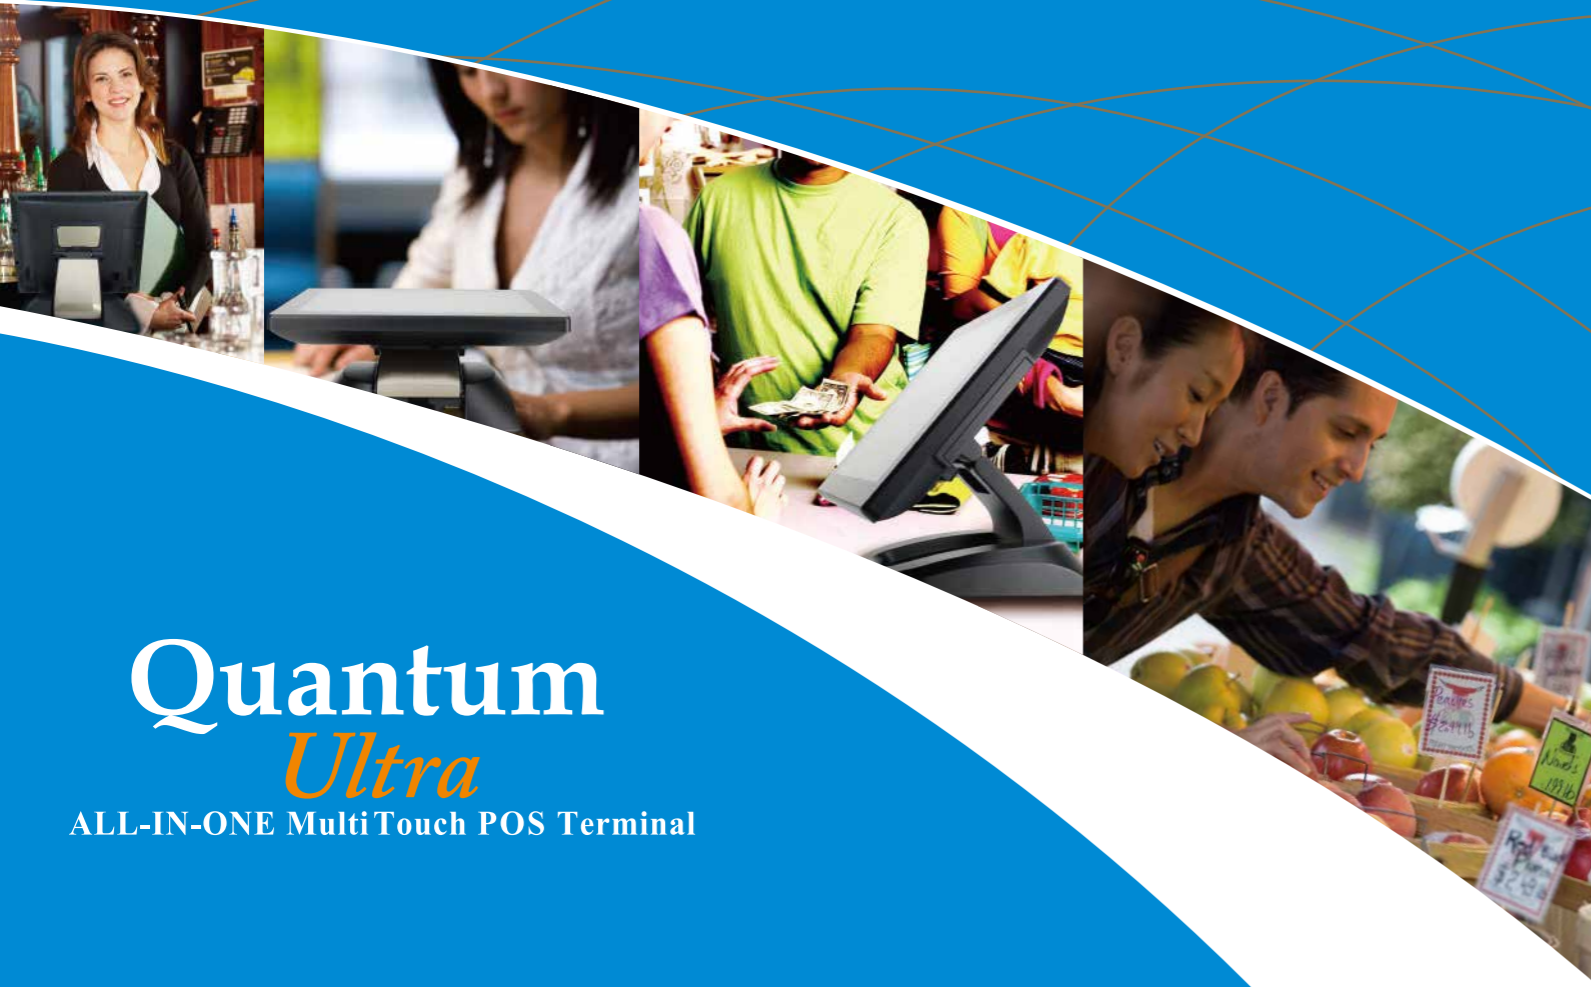

Quantum Ultra

ALL-IN-ONE Multi Touch POS Terminal

Web site: www.quripos.eu
E-mail: info@quripos.eu